

The following Product Datasheet is provided by Starcke

Wood Finishes Direct cannot be held liable for the information contained within this document.

For purchasing information visit: Starcke (Ersta) 6 Hole 88 x 93mm Aluminium Oxide Sanding Triangles



Product Information 514D | 514C2

Produc	t structu	re												
Backing				Robust D- and flexible C- weight latex paper										
Flexibil	ity			low	1	5	•	10 high						
Grain Type				Aluminium oxide										
Coating				very open										
Top Coat				Stearate Special top coat										
Manufactured Width				1	400mm	143	30mm	🗙 1650m	m 🗌 a	others				
Form	•••••			5				\odot	0	D				
Suitable for				🔀 hand sanding 🛛 hand held machine sanding 🕅 machine sanding										
Grits												Cerami	c, zirconia, # a	nd * = non P-Grit:
P 12	P 16	P 24	P 30	P 36	P 40	P 50	P 60	X P 80	P 100	P 120	P 150	P 180	P 220	P 240
P 280	P 320	P 360	P 400	P 500	P 600	P 800	P 1.00	00 🗌 P 1.20	0 P 1.500	P 2.000	P 2.500	ST 3.000) ST 6.00	00 ST 8.000
Materia	ls													
Aluminiu	m No	on-ferrous Metal	Stair ste		Steel	Titar	nium	Paint lacquer	Glas	S	Wood	Plastic	s	Stone/china

Application examples








Auto mobil repair

Furniture industry

Wind generator industry

- Smooth latex paper backing for optimal flexibility to a suit plain and contoured surfaces
- Increased sanding time due to an optimized abrasive grain coating in combination with a special anti-clogging system

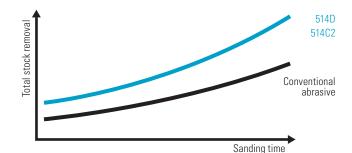

www.starcke.de